


APPENDIX D-16

Detailed procedures for Sub-Test II-16 Essential Service Protection (ESP)

D-16.1 ESP (Criteria II-16.2.a) JIEO Technical Report 8249 Paragraph 5.3.9

Restrict the number of tone/senders in the switch under test to thirty. Provision the switch with thirty analog lines (N1-N30) and connect to the AM2A call loader. Provision one analog instrument (N31) and class mark with ESP. Provision one analog instrument (N32) and class mark as non-ESP. (Note: This test procedure is only one method to invoke ESP).

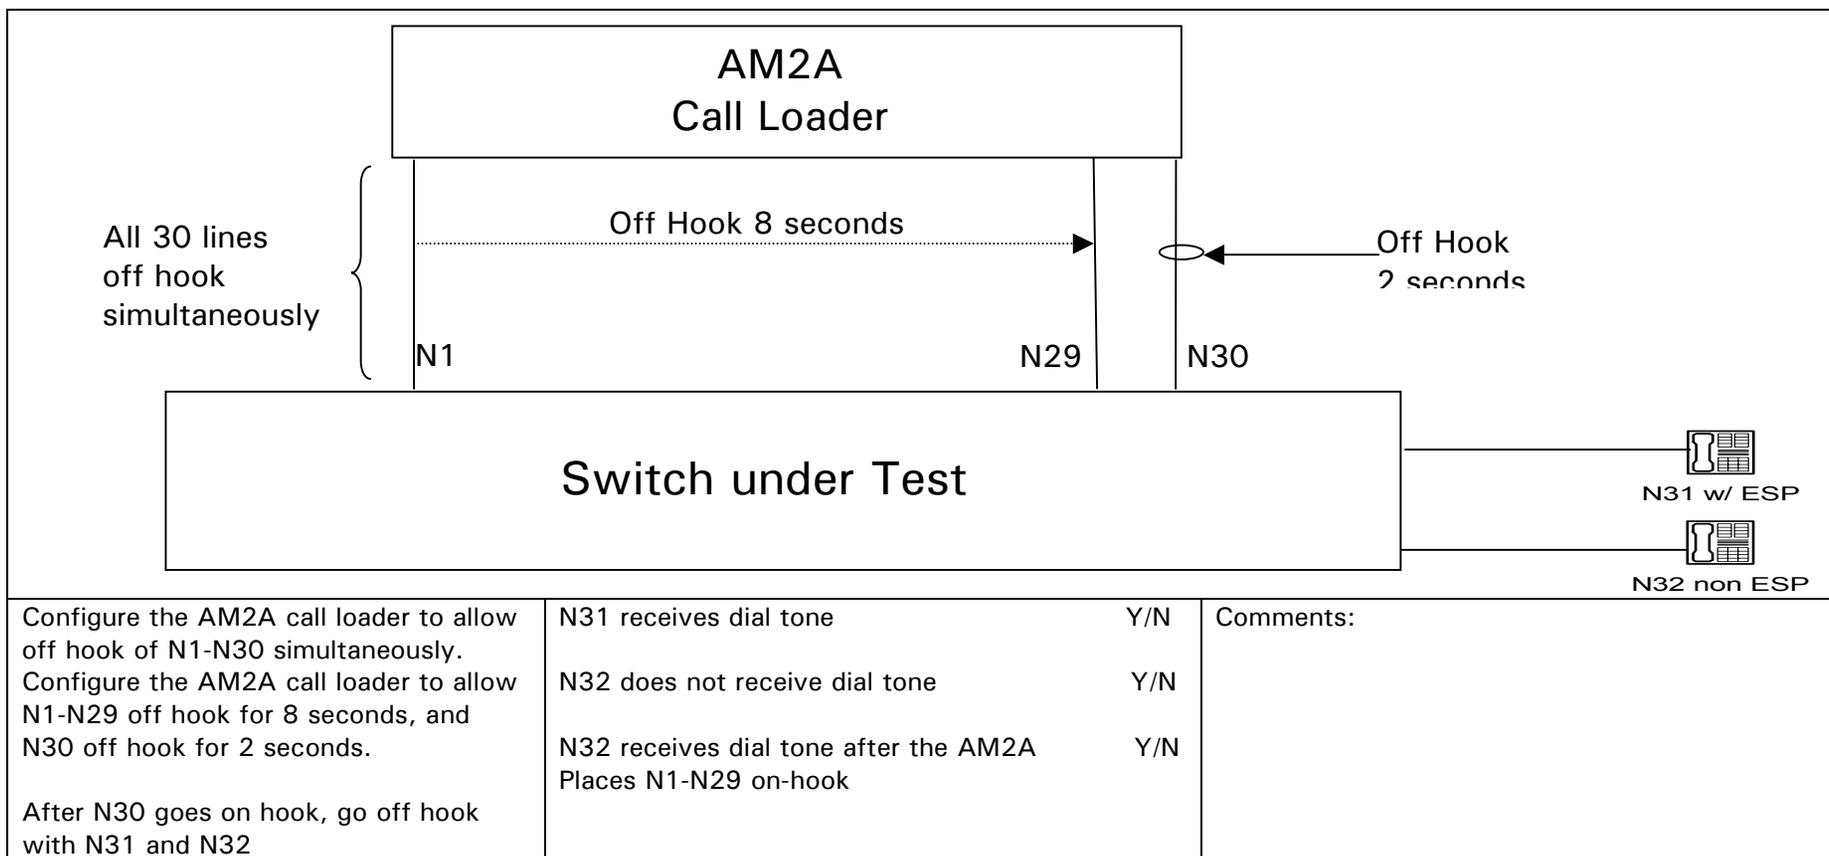

D-16.2 ESP Manual Control (Criteria II-16.2.b) JIEO Technical Report 8249 Paragraph 5.3.9

The ability of the switch to provide a remote database maintenance channel is tested in sub-test II-8 System Administration, Measurements, and Service Standards.